

# BELL-END 25


2,9 H/3,8 H



Aluhall on baseplates and single groundbeams.



Aluhall on baseplates and double groundbeams,

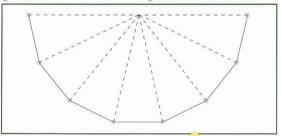

ioh view

All our structures are designed to comply with accessories such as hard sidewall panels, flooring, doors, decoration, etc... Please see separate leaflet. All above date is for information only and can be changed at any time, without notice.

#### FRAME

Self supporting frame of anodised aluminium profiles (6061-T6 alloy) with four keder channels, on baseplates in combination with single or double groundbeams. All parts are connected with pins for an easy and rapid installation.

#### ROOF FABRICS AND SIDEWALLS

A very high quality PVC coated polyester fabric, flame retardant to M2 (France) and DIN 4102 B1 (Germany). This fabric is treated anti-UV and anti-crypto which makes it more resistant against mildew and fungus. The roofsheets are tensioned vertically with aluminium tension tubes and ratchets.



Veldeman Tent Technology • Industrieterrein Vostert 1220 • 3960 Bree (Belgium) • Tel. +32 (0)89 47 31 31 • Fax +32 (0)89 47 37 77


E-mail: info@veldemantent.be • Website: www.veldemantent.be

# BELL-END 25 ▶ 2,9 H/3,8 H




#### **MEASURES**

CROSS SECTION

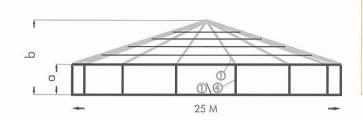

	2,9 m	3,8 m
a: eave height	2.96 m	3.83 m
b: ridge height	7.08 m	7.95 m
c: length roofbeam	7.63 m	7.63 m
d: length extension roofbeam	5.20 m	5.20 m
e: bay distance	5.57 m	5.57 m

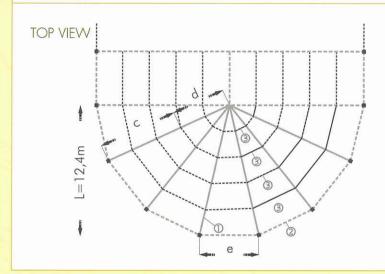

- 1: leg 2.9 m and roofbeam
- 2: eave purlin
- 3: intermediate purlin
- 4: leg 3.8 m











### **BUILDING STANDARDS**

The structure is designed in accordance with the British BS6399, German DIN 4112, French CTS and Eurocode.



WEIGHT (kg)			
	2,9 m	3,8 m	
frame	1819	1901	
frame fabric	358	372	
total	2177	2273	



## **LONGEST PART**

7625 mm



#### **SURFACE BELL - END 25 M**

245 m<sup>2</sup>